



BULK FEED TANKS

JULY 2008

BULK FEED TANKS 60° & 67°, 16" OPENING WITH COLLAR

Includes: Hopper tank complete with legs, sidewall, hopper, roof, loading cap with cap latch package & hardware.

HOPPER TANKS 6' X 60°, 16" OPENING WITH COLLAR

PART #	NBR	CAPACITY		HEIGHT (FT)	WEIGHT (PDS)	PRICE	PART #	PRICE	PART #	PRICE
		ROWS	MET. T.							
BFT 616016	1	2.5	111	10.7	466	2 213 \$	BLK-10630	182.00 \$		
BFT 626016	2	3.86	171	13.3	554	2 578 \$	BLK-10634	207.00 \$	AR801-303	123.00 \$
BFT 636016	3	5.21	231	15.1	642	2 894 \$	BLK-10635	250.00 \$	AR801-304	180.00 \$
BFT 646016	4	6.56	291	18.7	730	3 346 \$	BLK-10640	318.00 \$	AR801-305	228.00 \$

HOPPER TANKS 7' X 67°, 16" HOPENING WITH COLLAR

BFT 716716	1	4.17	185	13.6	795	3 186 \$	BLK-10634	207.00 \$	AR801-303	123.00 \$
BFT 726716	2	6.02	266	16.2	897	3 544 \$	BLK-10635	250.00 \$	AR801-304	180.00 \$
BFT 736716	3	7.86	348	18.9	998	3 923 \$	BLK-10640	318.00 \$	AR801-305	228.00 \$
BFT 746716	4	9.7	430	21.6	1100	4 393 \$	BLK-10637	340.00 \$	AR801-305A	295.00 \$
BFT 756716	5	11.54	511	24.2	1377	5 427 \$	BLK-10642	408.00 \$	AR801-306	320.00 \$
BFT 766716	6	13.39	593	26.1	1479	6 483 \$	BLK-10643	454.00 \$	AR801-306A	388.00 \$

N.B. FOR HOPPER TANKS BFT 756716 AND BFT 766716 SEE * BELOW THIS SHEET

HOPPER TANKS 9' X 60°, 16" OPENING WITH COLLAR

BFT 916016	1	6.96	308	14.1	1077	4 172 \$	BLK-10634	207.00 \$	AR801-303	123.00 \$
BFT 926016	2	10.01	443	16.9	1209	4 618 \$	BLK-10635	250.00 \$	AR801-304	180.00 \$
BFT 936016	3	13.06	578	19.5	1410	5 210 \$	BLK-10640	318.00 \$	AR801-305	228.00 \$
BFT 946016	4	16.1	713	22.1	1575	5 985 \$	BLK-10637	340.00 \$	AR801-305A	295.00 \$
BFT 956016	5	19.15	848	24.8	1739	6 710 \$	BLK-10642	408.00 \$	AR801-306	320.00 \$
BFT 966016	6	22.19	983	27.5	2112	8 202 \$	BLK-10643	454.00 \$	AR801-306A	388.00 \$
BFT 976016	7	25.83	1117	30.1	3230	On request	BLK-10644	522.00 \$	AR801-307	428.00 \$

N.B. FOR HOPPER TANKS BFT 936016 TO BFT 976016 SEE * BELOW THIS SHEET

HOPPER TANKS 12' X 60°, 16" HOPENING WITH COLLAR

BFT 1226016	2	22.64	923	20.6	2768	10 454 \$	BLK-10640	318.00 \$	AR801-305	228.00 \$
BFT 1236016	3	28.73	1175	23.2	2943	11 099 \$	BLK-10641	386.00 \$	AR801-305A	295.00 \$
BFT 1246016	4	34.82	1427	25.1	3226	12 020 \$	BLK-10642	408.00 \$	AR801-306	320.00 \$
BFT 1256016	5	40.91	1679	28.6	3719	13 574 \$	BLK-10643	454.00 \$	AR801-306A	388.00 \$
BFT 1266016	6	47	1931	31.2	4002	15 294 \$	BLK-10644	522.00 \$	AR801-307	428.00 \$
BFT 1276016	7	53.12	2184	33.1	4352	16 550 \$	BLK-10827	544.00 \$	AR801-308	493.00 \$

HOPPER TANKS 15' X 60°, 16" OPENING WITH COLLAR

BFT 1526016	2	39.49	1608	23.11	4684	24 027 \$	BLK-10637	340.00 \$	AR801-305A	295.00 \$
BFT 1536016	3	49	2001	26.7	4905	25 003 \$	BLK-10642	408.00 \$	AR801-306	320.00 \$
BFT 1546016	4	58.52	2395	29.3	5181	25 922 \$	BLK-10643	454.00 \$	AR801-306A	388.00 \$
BFT 1556016	5	68.04	2788	31.11	5800	27 521 \$	BLK-10826	476.00 \$	AR801-307	428.00 \$
BFT 1566016	6	77.55	3182	34.7	6156	28 996 \$	BLK-10827	544.00 \$	AR801-308	493.00 \$



P.S.

* These tanks are delivered with hopper reinforcement angles.

** 6', 7' & 9' diameter tanks are designed for the storage of free flowing material weighing not more than 40 pds/ft³.
12', 15', 18' & 21' diameter tanks are designed for the storage of free flowing material weighing not more than 45 pds/ft³.

EXTENSION HOPPERS

For applications requiring distances greater than the standard length of any given system, extension hoppers are available that can expand the delivery range to practically any distance and can provide access at 90° from the main line.

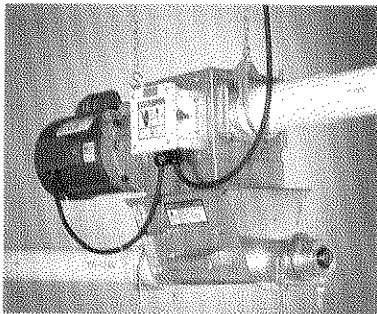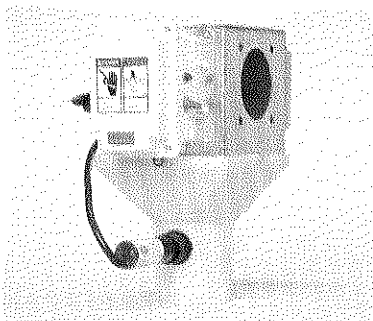


MODEL	TUBE DIAMETER O.D. (INCHES)	TUBE CORNER RADIUS (FEET)	MAX. SINGLE SYSTEM LENGTH (FEET)	MOTOR SIZES AT MAX. LENGTH (HORSEPOWER)	CAPACITY (LBS./MINUTE AT 40 LBS. PER CU. FT.)	MAXIMUM EXTENSION LENGTH (AT MOTOR END OF FIRST SYS.)
220	2.25"	10'	250'	.5	15	300
300	3"	6'	200'	1	50	240
HR	3.5"	6'	150'	1	50	180
350	3.5"	6'	150'	1	100	180
500	5"	6'	150'*	1.5	220	180'*

*For high moisture corn, reduce system length by 50%.


UNLOADERS

The 16" (406mm) parabolic boot (available in straight drop or 30° models) is made from the very latest in ultra high impact polypropylene for greater flexibility, dependability and durability. GSI's polypropylene resin blend contains special chemical ultraviolet light inhibitors and impact modifiers to further enhance durability and resilience.

Multiple outlet requirements can be easily handled by our 22" (559mm) all metal boot. This boot, which can be fitted to any GSI feed bin, will allow installation of up to four feed lines in several directions at once.

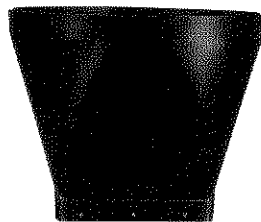

Straight Drop Boot

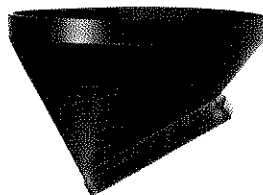

30° Drop Boot



BULK FEED TANKS

GSI's Bulk Feed Tanks along with the Flex Flo™ System illustrate the attention to detail that quality demands. Every component is made from the finest raw materials available. Every stage of the forming process, from corrugation to die-cut shaping, to precision finishing, is done under one roof and under our direct control and supervision.

Model 220
(2.20"/55mm)

Model 300
(2.95"/75mm)

Model 350
(3.5"/90mm)

Model 500
(5"/125mm)

Flex Flo™ Systems